


TABLE	UNPLATING/REEL	PLATING	PART NO.	DESCRIPTION			PIECE
1	A1800000A	A1860000A	A1860A30A	A Point	B Point	C Point	30PIN
	A1860000A	A1860A40A		CU FLASH	AG 80U	AG FLASH	40PIN

REVISION			
REV	DESCRIPTION	BY	DATE
A	NEW DRAWING	J.S.SHEU	02/02/09
B	EN 0912-006	LMOY	12/23/09
C	EN 1003-003	LMOY	03/02/10
D	EN 1006-002	JOE	06/09/10

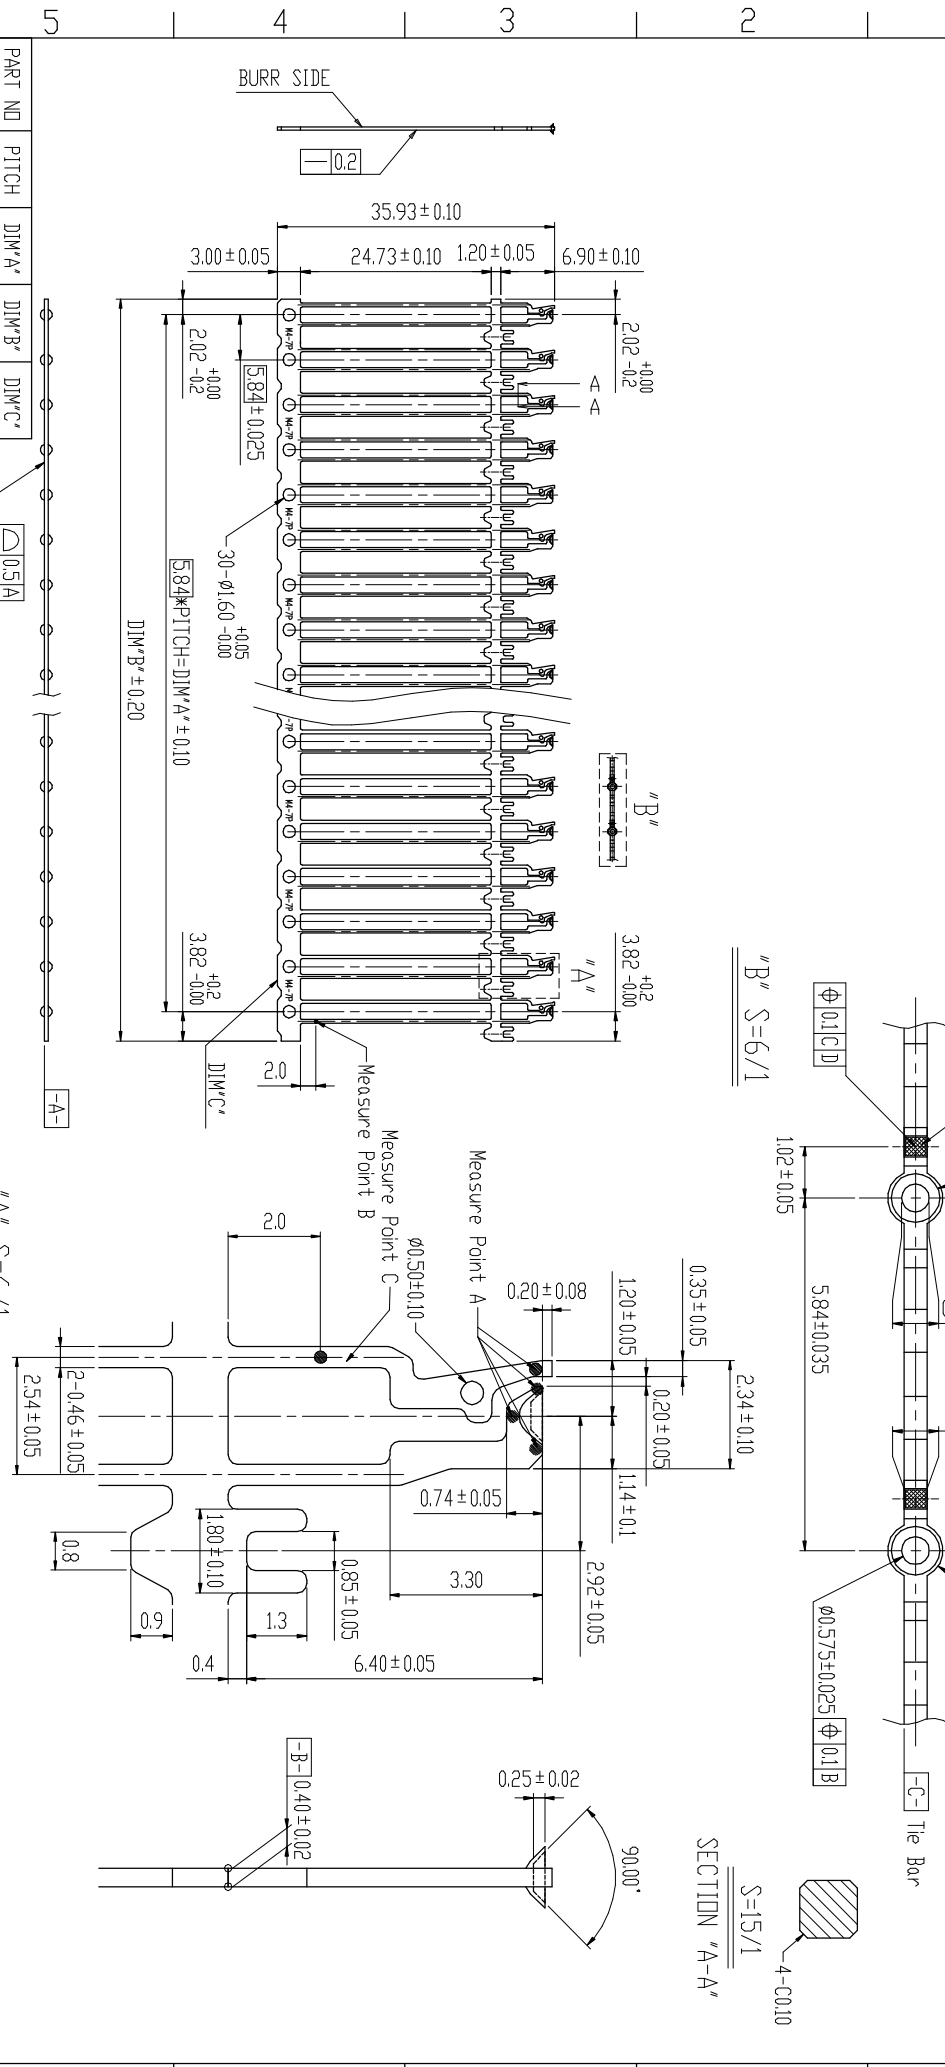

PART NO	PITCH	DIM'A	DIM'B	DIM'C
A1860A30A	29	169.36	175.20	0.10
A1860A40A	39	227.76	233.60	0.15

- NOTE:
1. MATERIAL: 0.40±0.02 THICK SPCC-SD.
 2. BURR: 0.05 MAX. UNLESS OTHERWISE SPECIFIED.
 3. RADIUS: 0.30 MAX. ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
 4. CAN NOT BE DISCARD AFTER BY 160° BAKING FOR 2 HOURS.

ANGLES 0°±20'		DR	DATE	MAT'L
0.0±0.13	MM	JOE	06/09/10	SEE NOTE 1
0.00±0.05	ENGR			FINISH SEE PART NO. TABLE
0.000±0.03	APPD			DWG. NO. M0348

CHAIN PRECISION INDUSTRIAL CO., LTD.

SCALE	SIZE	PART NO.	REV
1:1	A4	E03048-A18XXXXXA	D

A B C D E F G H I