
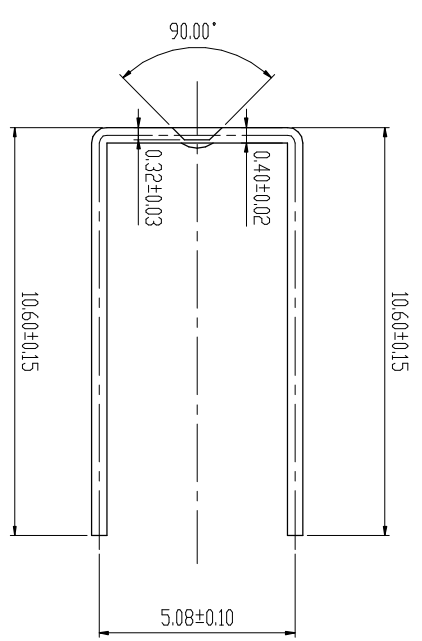


| REVISION | | | |
|----------|--------------|----------|-----------|
| REV | DESCRIPTION | BY | DATE |
| A | NEW DRAWING | J.S.SHEU | 03/30/05' |
| B | ECN 0604-016 | J.S.SHEU | 04/26/06' |
| C | MODIFY P/N | J.S.SHEU | 01/02/07' |

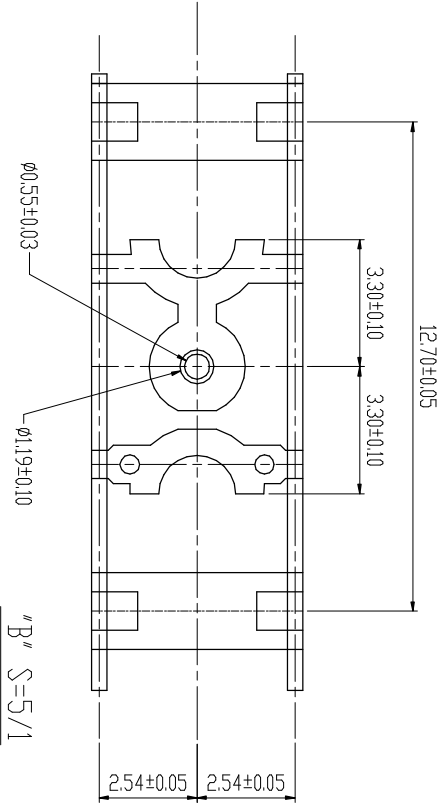

- NOTES:
1. MATERIAL: 04±0.02 THICK ALLOY-194
 2. BURR: 0.05MAX. UNLESS OTHERWISE SPECIFIED.
 3. RADIUS: 0.3MAX ON ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
 4. BDW: NOT TO EXCEED 0.5 IN A 15 FRAME STRIP.
 5. CROSS BDW: NOT TO EXCEED 0.15 TO 25.4 WIDTH.
 6. TWIST: 0.5MAX. IN A 15 FRAME STRIP.
 7. CAMBER: LESS THAN 0.1 WHEN MEASURED OVER 15 POSITIONS.
 8. TWISTING ANGLE: ±2°MAX. OF THE BDW.
 9. TOLERANCE: ±0.1 UNLESS OTHERWISE SPECIFIED.

| | | | | | | | | | |
|---------------------------------------|--|-----------|--|------|----------|---------------|-----------|------------|------------|
| ANGLES: 0°±20' | | M/M | | DR | J.S.SHEU | DATE | 01/02/07' | MAT'L | SEE NOTE 1 |
| 0.0±0.13 | | 0.00±0.05 | | CHK | J.S.SHEU | DATE | 01/02/07' | FINISH | SEE NOTE 2 |
| 0.000±0.03 | | APPD | | ENGR | | | | DWG. NO. | M0346 |
| TITLE | | SCALE | | SIZE | | PART. NO. | | REV | |
| CHALIN PRECISION INDUSTRIAL CO., LTD. | | 1:1 | | A4 | | E0346-A566U5A | | C | |
| 2041-M41-5AU | | | | | | | | SHT 1 OF 1 | |

Grid lines: A, B, C, D, E, F, G, H, I

Vertical axis: 1, 2, 3, 4, 5